


Intellimod™ L-Series Three Phase IGBT Inverter 200 Amperes/600 Volts

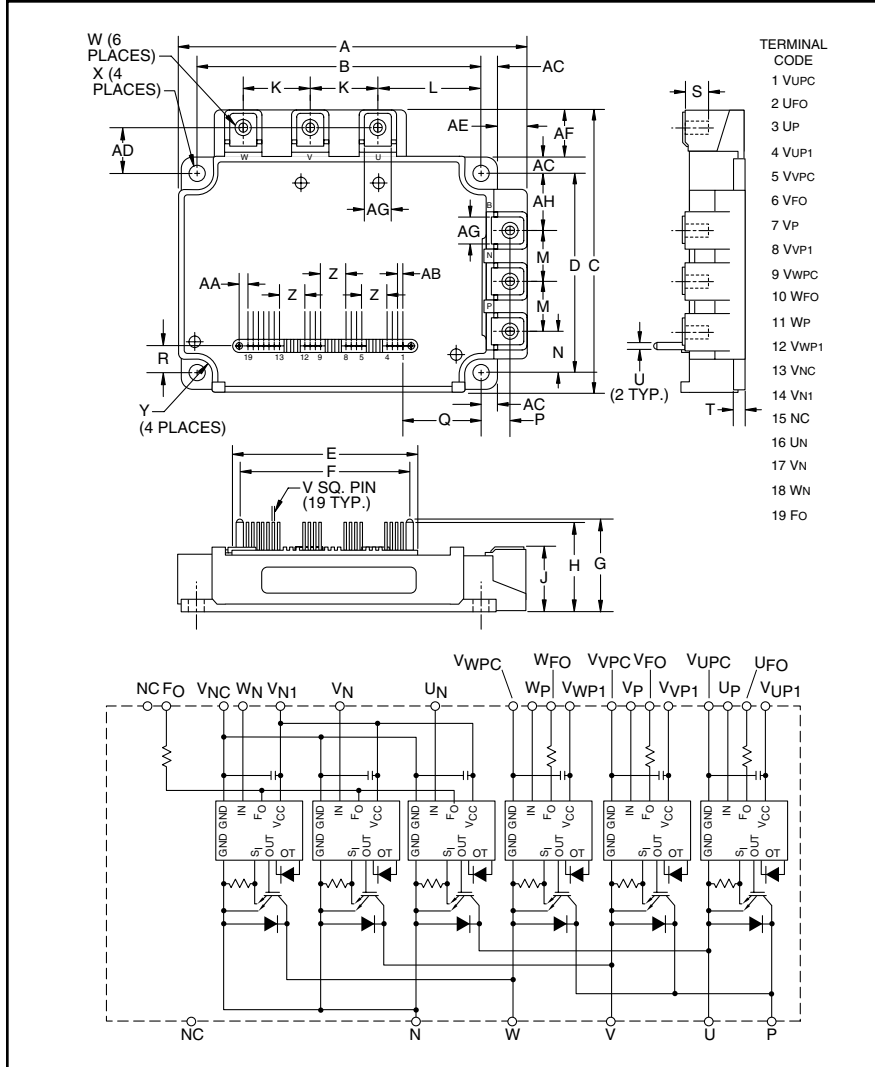

Outline Drawing and Circuit Diagram

| Dimensions | Inches | Millimeters |
|------------|-----------------|---------------|
| A | 5.31 | 135.0 |
| B | 4.33±0.02 | 110±0.5 |
| C | 4.33 | 110.0 |
| D | 3.07 | 78.0±0.5 |
| E | 2.81 | 71.5 |
| F | 2.62 | 66.5 |
| G | 1.37 | 34.7 |
| H | 1.32 | 33.6 |
| J | 0.95+0.04/-0.01 | 24.1+1.0/-0.5 |
| K | 1.02 | 26.0 |
| L | 1.59 | 40.5 |
| M | 0.79 | 20.0 |
| N | 0.65 | 16.5 |
| P | 0.43±0.01 | 11.0±0.3 |
| Q | 1.19 | 30.15 |
| R | 0.43 | 11.0 |

| Dimensions | Inches | Millimeters |
|------------|-----------|-------------|
| S | 0.51 | 13.0 |
| T | 0.16 | 4.0 |
| U | 0.1 Dia. | Dia.2.5 |
| V | 0.02 Sq. | Sq. 0.5 |
| W | M5 Metric | M5 |
| X | 0.22 Dia. | Dia. 5.5 |
| Y | 0.24 Rad. | Rad. 6 |
| Z | 0.39 | 10.0 |
| AA | 0.13 | 3.25 |
| AB | 0.08 | 2.0 |
| AC | 0.24 | 6.05 |
| AD | 0.71 | 18.0 |
| AE | 0.46 | 11.7 |
| AF | 0.74 | 18.7 |
| AG | 0.41 | 10.5 |
| AH | 0.85 | 21.5 |



Description:

Powerex Intellimod™ Intelligent Power Modules are isolated base modules designed for power switching applications operating at frequencies to 20kHz. Built-in control circuits provide optimum gate drive and protection for the IGBT and free-wheel diode power devices.

Features:

- Complete Output Power Circuit
- Gate Drive Circuit
- Protection Logic
 - Short Circuit
 - Over Temperature
 - Using On-chip Temperature Sensing
 - Under Voltage
- Low Loss Using 5th Generation IGBT Chip

Applications:

- Inverters
- UPS
- Motion/Servo Control
- Power Supplies

Ordering Information:

Example: Select the complete part number from the table below -i.e. PM200CLA060 is a 600V, 200 Ampere Intellimod™ Intelligent Power Module.

| Type | Current Rating Amperes | V _{CES} Volts (x 10) |
|------|---------------------------|----------------------------------|
| PM | 200 | 60 |

PM200CLA060
Intellimod™ L-Series
Three Phase IGBT Inverter
 200 Amperes/600 Volts

Absolute Maximum Ratings, $T_j = 25^\circ\text{C}$ unless otherwise specified

| Characteristics | Symbol | PM200CLA060 | Units |
|---|------------------------|-------------|------------------|
| Power Device Junction Temperature | T_j | -20 to 150 | $^\circ\text{C}$ |
| Storage Temperature | T_{stg} | -40 to 125 | $^\circ\text{C}$ |
| Mounting Torque, M5 Mounting Screws | — | 31 | in-lb |
| Mounting Torque, M5 Main Terminal Screws | — | 31 | in-lb |
| Module Weight (Typical) | — | 800 | Grams |
| Supply Voltage, Surge (Applied between P - N) | $V_{\text{CC(surge)}}$ | 550 | Volts |
| Self-protection Supply Voltage Limit (Short Circuit protection Capability)* | $V_{\text{CC(prot.)}}$ | 400 | Volts |
| Isolation Voltage, AC 1 minute, 60Hz Sinusoidal | V_{ISO} | 2500 | Volts |

*VD = 13.5 ~ 16.5V, Inverter Part, $T_j = 125^\circ\text{C}$


IGBT Inverter Sector

| | | | |
|--|---------------------|-----|---------|
| Collector-Emitter Voltage ($V_D = 15\text{V}$, $V_{\text{CIN}} = 15\text{V}$) | V_{CES} | 600 | Volts |
| Collector Current ($T_C = 25^\circ\text{C}$) | $\pm I_C$ | 200 | Amperes |
| Peak Collector Current ($T_C = 25^\circ\text{C}$) | $\pm I_{\text{CP}}$ | 400 | Amperes |
| Collector Dissipation ($T_C = 25^\circ\text{C}$) | P_C | 600 | Watts |

Control Sector

| | | | |
|--|------------------|----|-------|
| Supply Voltage (Applied between $V_{\text{UP1}}-V_{\text{U1PC}}$, $V_{\text{VP1}}-V_{\text{V1PC}}$, $V_{\text{WP1}}-V_{\text{W1PC}}$, $V_{\text{N1}}-V_{\text{N1C}}$) | V_D | 20 | Volts |
| Input Voltage (Applied between U_P-V_{U1PC} , V_P-V_{V1PC} , W_P-V_{W1PC} , U_N-V_{N1C} , W_N-V_{N1C}) | V_{CIN} | 20 | Volts |
| Fault Output Supply Voltage (Applied between $U_{\text{FO}}-V_{\text{U1PC}}$, $V_{\text{FO}}-V_{\text{V1PC}}$, $W_{\text{FO}}-V_{\text{W1PC}}$, F_O-V_{N1C}) | V_{FO} | 20 | Volts |
| Fault Output Current (U_{FO} , V_{FO} , W_{FO} , F_O Terminals) | I_{FO} | 20 | mA |

Note 1: T_C (Base Plate) Measurement Point

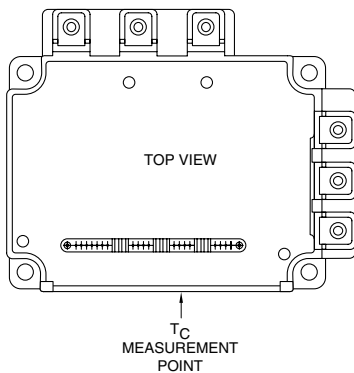

PM200CLA060
Intellimod™ L-Series
Three Phase IGBT Inverter
200 Amperes/600 Volts

Electrical and Mechanical Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified

| Characteristics | Symbol | Test Conditions | Min. | Typ. | Max. | Units |
|---|---------------|--|------|------|------|------------------|
| IGBT Inverter Sector | | | | | | |
| Collector-Emitter Cutoff Current | I_{CES} | $V_{CE} = V_{CES}, V_D = 15V, T_j = 25^\circ\text{C}$ | — | — | 1.0 | mA |
| | | $V_{CE} = V_{CES}, V_D = 15V, T_j = 125^\circ\text{C}$ | — | — | 10 | mA |
| Diode Forward Voltage | V_{EC} | $-I_C = 200A, V_{CIN} = 15V, V_D = 15V$ | — | 2.2 | 3.3 | Volts |
| Collector-Emitter Saturation Voltage | $V_{CE(sat)}$ | $V_D = 15V, V_{CIN} = 0V, I_C = 200A, T_j = 25^\circ\text{C}$ | — | 1.6 | 2.1 | Volts |
| | | $V_D = 15V, V_{CIN} = 0V, I_C = 200A, T_j = 125^\circ\text{C}$ | — | 1.5 | 2.0 | Volts |
| Inductive Load Switching Times | t_{on} | | 0.5 | 1.0 | 2.4 | μs |
| | t_{rr} | $V_D = 15V, V_{CIN} = 0 \Leftrightarrow 15V$ | — | 0.2 | 0.4 | μs |
| | $t_{C(on)}$ | $V_{CC} = 300V, I_C = 200A$ | — | 0.4 | 1.0 | μs |
| | t_{off} | $T_j = 125^\circ\text{C}$ | — | 1.2 | 2.5 | μs |
| | $t_{C(off)}$ | | — | 0.5 | 1.0 | μs |
| Control Sector | | | | | | |
| Short Circuit Trip Level | SC | $-20^\circ\text{C} \leq T_j \leq 125^\circ\text{C}, V_D = 15V$ | 400 | — | — | Amperes |
| Short Circuit Current Delay Time | $t_{off(SC)}$ | $V_D = 15V$ | — | 0.2 | — | μs |
| Over Temperature Protection | OT | Trip Level | 135 | 145 | 155 | $^\circ\text{C}$ |
| (Detect T_j of IGBT Chip) | OT_R | Reset Level | — | 125 | — | $^\circ\text{C}$ |
| Supply Circuit Under-voltage Protection | UV | Trip Level | 11.5 | 12.0 | 12.5 | Volts |
| ($-20 \leq T_j \leq 125^\circ\text{C}$) | UV_R | Reset Level | — | 12.5 | — | Volts |
| Circuit Current | I_D | $V_D = 15V, V_{CIN} = 15V, V_{N1}-V_{NC}$ | — | 18 | 28 | mA |
| | | $V_D = 15V, V_{CIN} = 15V, V_{XP1}-V_{XPC}$ | — | 6 | 12 | mA |
| Input ON Threshold Voltage | $V_{th(on)}$ | Applied between U_P-V_{UPC} . | 1.2 | 1.5 | 1.8 | Volts |
| Input OFF Threshold Voltage | $V_{th(off)}$ | $V_P-V_{VPC}, W_P-V_{WPC}, U_N-V_N, W_N-V_{NC}$ | 1.7 | 2.0 | 2.3 | Volts |
| Fault Output Current* | $I_{FO(H)}$ | $V_D = 15V, V_{CIN} = 15V$ | — | — | 0.01 | mA |
| | $I_{FO(L)}$ | $V_D = 15V, V_{CIN} = 15V$ | — | 10 | 15 | mA |
| Fault Output Pulse Width* | t_{FO} | $V_D = 15V$ | 1.0 | 1.8 | — | ms |

*Fault output is given only when the internal SC, OT and UV protections schemes of either upper or lower device operate to protect it.



Powerex, Inc., 200 E. Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

PM200CLA060
Intellimod™ L-Series
Three Phase IGBT Inverter
200 Amperes/600 Volts

Electrical and Mechanical Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified

| Characteristics | Symbol | Test Conditions | Min. | Typ. | Max. | Units |
|-----------------|--------|-----------------|------|------|------|-------|
|-----------------|--------|-----------------|------|------|------|-------|

Thermal Characteristics










| Characteristic | Symbol | Condition | Min. | Typ. | Max. | Units |
|-------------------------------------|----------------|---|------|------|-------|-----------------------|
| Junction to Case Thermal Resistance | $R_{th(j-c)Q}$ | IGBT (Per 1/6 Module) (Note 1) | — | — | 0.21 | $^\circ\text{C/Watt}$ |
| | $R_{th(j-c)D}$ | FWDi (Per 1/6 Module) (Note 1) | — | — | 0.33 | $^\circ\text{C/Watt}$ |
| | $R_{th(j-c)Q}$ | IGBT (Per 1/6 Module) | — | — | 0.16 | $^\circ\text{C/Watt}$ |
| | $R_{th(j-c)D}$ | FWDi (Per 1/6 Module) | — | — | 0.25 | $^\circ\text{C/Watt}$ |
| Contact Thermal Resistance | $R_{th(c-f)}$ | Case to Fin Per Module, Thermal Grease Applied | — | — | 0.023 | $^\circ\text{C/Watt}$ |

Recommended Conditions for Use

| Characteristic | Symbol | Condition | Value | Units |
|---------------------------------|----------------|--|----------------|---------------|
| Supply Voltage | V_{CC} | Applied across P-N Terminals | ≤ 400 | Volts |
| Control Supply Voltage* | V_D | Applied between $V_{UP1}-V_{UPC}$, $V_{VP1}-V_{VPC}$, $V_{WP1}-V_{WPC}$, $V_{N1}-V_{NC}$ | 15.0 ± 1.5 | Volts |
| Input ON Voltage | $V_{CIN(on)}$ | Applied between U_P-V_{UPC} , | ≤ 0.8 | Volts |
| Input OFF Voltage | $V_{CIN(off)}$ | V_P-V_{VPC} , W_P-V_{WPC} , U_N-V_N , W_N-V_{NC} | ≥ 9.0 | Volts |
| PWM Input Frequency | f_{PWM} | — | ≤ 20 | kHz |
| Arm Shoot-through Blocking Time | t_{DEAD} | Input Signal | ≥ 2.0 | μs |

*With ripple satisfying the following conditions: dv/dt swing $\leq \pm 5V/\mu\text{s}$, Variation $\leq 2V$ peak to peak.

PM200CLA060
Intellimod™ L-Series
Three Phase IGBT Inverter
 200 Amperes/600 Volts

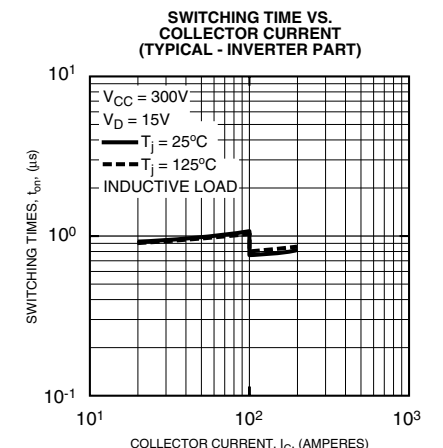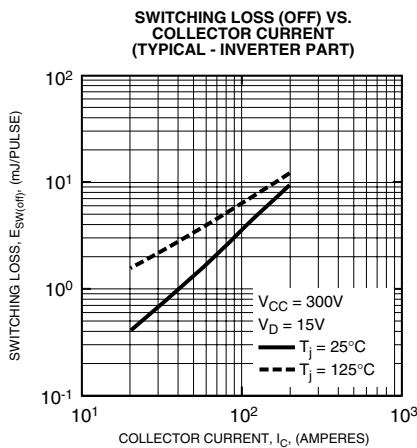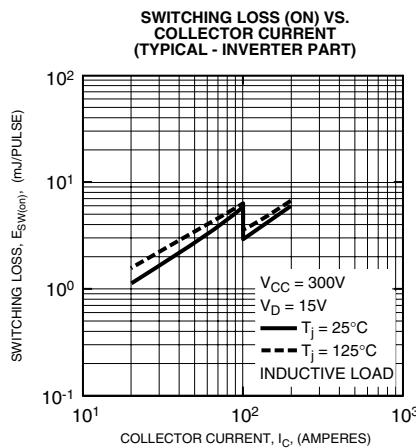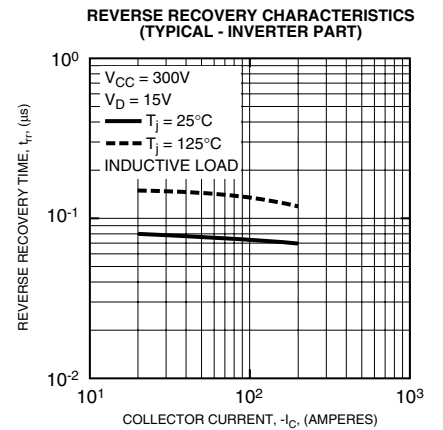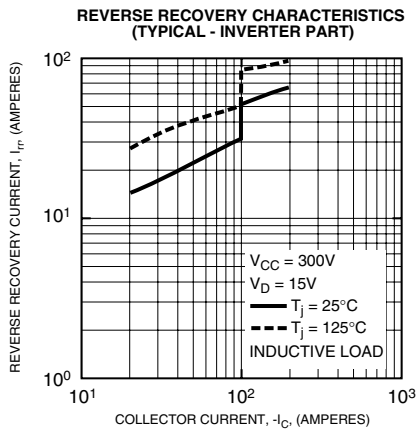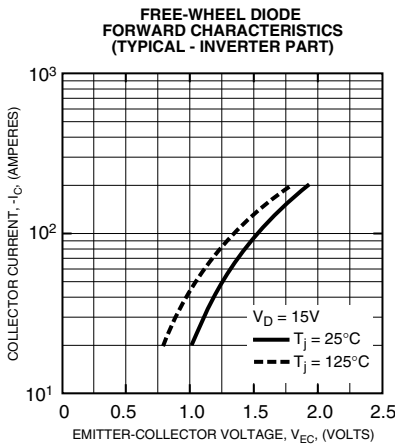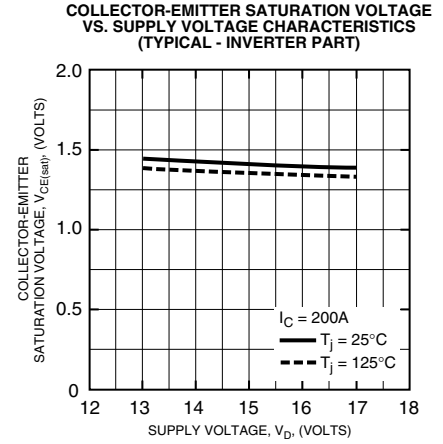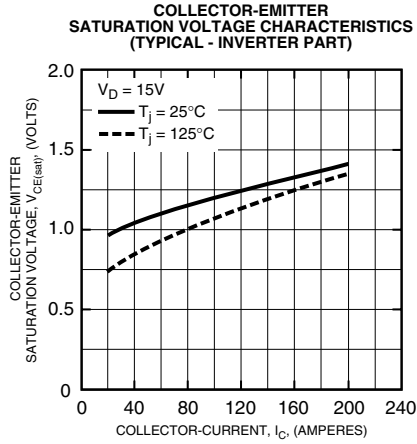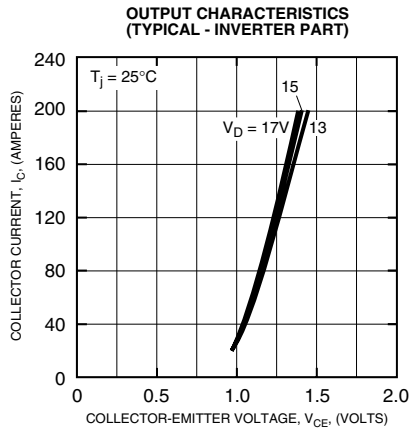

PM200CLA060
Intellimod™ L-Series
Three Phase IGBT Inverter
 200 Amperes/600 Volts

