


# Low On-Resistance, 3.3V High-Bandwidth 3-Port, 4:1 Mux/DeMux VideoSwitch

#### **Features**

- · Near-Zero propagation delay
- $5\Omega$  switches connect inputs to outputs
- High signal passing bandwidth (375MHz)
- · Beyond Rail-to-Rail switching
- 5V I/O tolerant with 3.3V supply
- 2.5V and 3.3V supply voltage operation
- Hot insertion capable
- Low Crosstalk ( $X_{TALK} = -60 dB Typ.$ )
- Low Off-Isolation (O<sub>IRR</sub> = -60db Typ.)
- Industrial operating temperature: -40°C to +85°C
- 2KV ESD Protection (human body model)
- Latch-up performance >250mA per JESD17
- Packaging (Pb-free & greeen available):
   40-Pin 150-mil wide plastic BQSOP(B)

## Pin Configuration

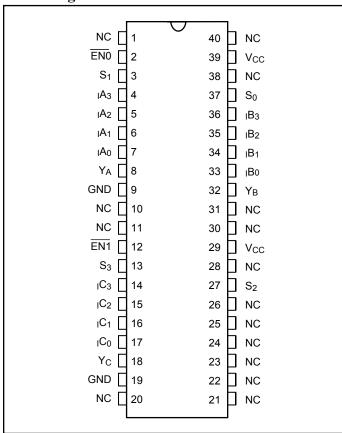

## **Description**

The PI3V314 is a true bi-directional 3-Port 4:1 multiplexer/demultiplexer with Hi-Z outputs that is recommended for both RGB and composite video switching applications. With the increased 4:1 channels, multiple components, such as VCR, DVD, PC1, PC2 and etc. can be put on the video networks. The VideoSwitch can be driven from a current output RAMDAC or voltage output composite video source.

Low On-Resistance, Low Crosstalk, Low OFF Isolation and wide bandwidth features make it ideal for video and other applications. Industry leading advantages include a near zero propagation delay, resulting from its low channel resistance and I/O capacitance. The switch is bi-directional and offers little or no attenuation of the high-speed signals at the outputs. The device also has exceptional high current capability which is far greater than most analog switches offered today. The PI3V314 offers a high-performance (375 MHz), low-cost solution to switch between video sources.

## **Applications**

- · Projection TV and LCD TV
- Video consumer applications
- Analog video signal processing

#### Pin Description

Pin Name	Description
IAN, IBN	Data Inputs
S <sub>0-3</sub>	Select Inputs
$\overline{\text{EN}_0}$ to $\overline{\text{EN}_1}$	Enable
Y <sub>A</sub> to Y <sub>C</sub>	Data Outputs
GND	Ground
V <sub>CC</sub>	Power


#### **Notes:**

1. N.C = No internal connection

06-0114 1 PS8756C 06/29/06



## **Block Diagram**

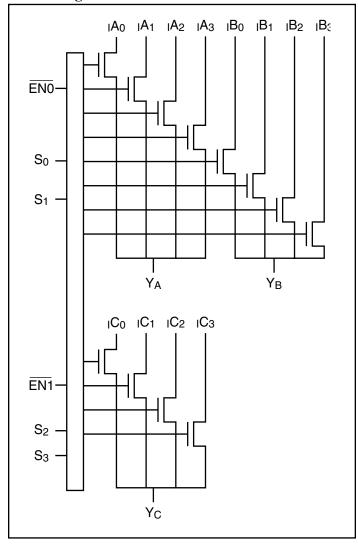

## Truth Table 1<sup>(1)</sup>

Enable	Select			
$\overline{\mathrm{EN}_0}$	S <sub>1</sub>	S <sub>0</sub>	Y <sub>A</sub> /Y <sub>B</sub>	Function
Н	X	X	Hi-Z	Disable
L	L	L	10	S1-S0=0
L	L	Н	I1	S1-S0 = 1
L	Н	L	I2	S1-S0 = 2
L	Н	Н	13	S1-S0 = 3

## **Truth Table 2**<sup>(1)</sup>

Enable	Select			
$\overline{EN_1}$	S <sub>3</sub>	S <sub>2</sub>	Y <sub>C</sub>	Function
Н	X	X	Hi-Z	Disable
L	L	L	10	S3-S2 = 0
L	L	Н	I1	S3-S2 = 1
L	Н	L	I2	S3-S2 = 2
L	Н	Н	I3	S3-S2 = 3

#### **Notes:**

1. H=High Voltage Level; L=Low Voltage Level

#### **Notes:**

- 1. For video applications: In order to control Muxing and DeMuxing of all the 12 to 3 channels with the same control plane, the following connectoins need to be made on the board:
  - a.  $\overline{\text{EN0}}$  and  $\overline{\text{EN1}}$  need to be tied together
  - b. S1 and S3 need to be tied together
  - c. S0 and S2 need to be tied together

06-0114 2 PS8756C 06/29/06



#### **Maximum Ratings**

(Above which the useful life may be impaired. For user guidelines, not tested.)

Storage Temperature	–65°C to +150°C
Ambient Temperature with Power Applied	–40°C to +85°C
Supply Voltage to Ground Potential	0.5V to +4.6V
DC Input Voltage	0.5V to +6.0V
DC Output Current	120mA
Power Dissipation	0.5W

#### Note:

Stresses greater than those listed under MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

### **DC Electrical Characteristics, 3.3V Supply** (Over the Operating Range, $T_A = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$ , $V_{CC} = 3.3\text{V} \pm 10\%$ )

Parameters	Description	Test Conditions <sup>(1)</sup>	Min.	<b>Typ</b> <sup>(2)</sup>	Max.	Units
$V_{\mathrm{IH}}$	Input HIGH Voltage	Guaranteed Logic HIGH Level	2.0			
$V_{\mathrm{IL}}$	Input LOW Voltage	Guaranteed Logic LOW Level	-0.5		0.8	V
V <sub>IK</sub>	Clamp Diode Voltage	$V_{CC} = Min., I_{IN} = -18 \text{ mA}$		-1.3	-1.8	
$I_{\mathrm{IH}}$	Input HIGH Current	$V_{CC} = Max., V_{IN} = V_{CC}$			±1	
$I_{ m IL}$	Input LOW Current	$V_{CC} = Max., V_{IN} = GND$			±1	μΑ
I <sub>OZH</sub>	High Impedance Output Current	$0 \le Y$ , $In \le V_{CC}$			±1	
R <sub>ON</sub>	Switch On-Resistance <sup>(3)</sup>	$V_{CC} = Min., V_{IN} = 0V,$ $I_{ON} = 48 \text{ mA or } -64\text{mA}$		4	6	Ω
		$V_{CC} = Min., V_{IN} = 3.6V, I_{ON} = -15 \text{ mA}$		5	8	

## $\textbf{DC Electrical Characteristics, 2.5V Supply} \ (\text{Over Operating Range, T}_A = -40^{\circ}\text{C to } +85^{\circ}\text{C}, \ V_{CC} = 2.5\text{V} \pm 10\%)$

Parameters <sup>(5)</sup>	Description	Test Conditions <sup>(1)</sup>	Min.	Typ.(2)	Max.	Units
V <sub>IH</sub>	Input HIGH Voltage	Guaranteed Logic HIGH Level	1.8		$V_{CC} + 0.3$	
$V_{\mathrm{IL}}$	Inout LOW Voltage	Guaranteed Logic LOW Level	-0.3		0.8	V
V <sub>IK</sub>	Clamp Diode Voltage	$V_{CC} = Max., I_{IN} = -6mA$		-0.7	-1.8	
I <sub>IH</sub>	Input HIGH Current	$V_{CC} = Max., V_{IN} = V_{CC}$			±1	
$I_{\mathrm{IL}}$	Input LOW Current	$V_{CC} = Max., V_{IN} = GND$			±1	μΑ
I <sub>OZH</sub>	High Impedance Current	$0 \le Y$ , $In \le V_{CC}$			±1	
D	Switch On Resistance(3)	$V_{CC} = Min., V_{IN} = 0V,$ $I_{ON} = -48mA$		6	8	Ω
$R_{ON}$	Switch On-Resistance <sup>(3)</sup>	$V_{CC} = Min., V_{IN} = 2.25V,$ $I_{ON} = -15mA$		7	14	22

#### **Notes:**

- 1. For Max. or Min. conditions, use appropriate value specified under Electrical Characteristics for the applicable device type.
- 2. Typical values are at  $V_{CC} = 3.3V$ ,  $T_A = 25$ °C ambient and maximum loading.
- 3. Measured by the voltage drop between Y and In pin at indicated current through the switch. On-Resistance is determined by the lower of the voltages on the two (Y, In) pins.

06-0114 3 PS8756C 06/29/06



### **Capacitance** ( $T_A = 25$ °C f = 1 MHz)

Parameters <sup>(2)</sup>	Description	Test Conditions	Typ. <sup>(1)</sup>	Units
$C_{IN}$	Input Capacitance		3.0	
$C_{OFF(IN)}$	In Capacitance, Switch Off	V0V	3.5	»E
$C_{OFF(Y)}$	Y Capacitance, Switch Off	$V_{IN} = 0V$	12	pF
$C_{ON}$	Y/In Capacitance, Switch On		15.0	

#### **Notes:**

- 1. Typical values are at  $V_{CC} = 3.3V$ ,  $T_A = 25^{\circ}C$  ambient and maximum loading.
- 2. This parameter is determined by device characterization but is not production tested.

## **Power Supply Characteristics**

Parameters	Description	Test Conditions <sup>(1)</sup>	Min.	Typ.(2)	Max.	Units
$I_{CC}$	Quiescent Power Supply Current	$V_{CC} = 3.6V$ , $V_{IN} = GND$ or $V_{CC}$			1.6	mA

#### **Notes:**

- 1. For Max. or Min. conditions, use appropriate value specified under Electrical Characteristics for the applicable device.
- 2. Typical values are at  $V_{CC} = 3.3V$ , +25°C ambient.

## **Dynamic Electrical Characteristics Over the Operating Range** ( $T_A = -40^{\circ}$ to $+85^{\circ}$ , $V_{CC} = 3.3 \text{V} \pm 10\%$ )

Parameter	Description	<b>Test Condition</b>	Min.	Тур.	Max.	Units
X <sub>TALK</sub>	Crosstalk	See Test Diagram (10 MHz)		-60		dB
O <sub>IRR</sub>	Off-Isolation	See Test Diagram (10 MHz)		-60		uБ
BW	-3dB Bandwidth	See Test Diagram ( $C_L = 0pF$ )		375		MHz

06-0114 4 PS8756C 06/29/06



## **Switching Characteristics over 3.3V Operating Range**

Danamatana	Description	Conditions <sup>(1)</sup>	Со	II	
Parameters	Description	Conditions	Min.	Max.	Units
t <sub>PLH</sub> t <sub>PHL</sub>	Propagation Delay <sup>(2,3)</sup> Y to In, In to Y	See Test Diagram		0.3	
t <sub>PZH</sub> t <sub>PZL</sub>	Enable Time S or $\overline{\mathrm{EN}}$ to Y or In	San Tagt Diagram	1.5	9.0	ns
t <sub>PHZ</sub> t <sub>PLZ</sub>	Disable Time S or $\overline{EN}$ to Y or In	See Test Diagram	1.5	9.0	


### Switching Characteristics over 2.5V Operating Range

Dayamataya	Description	Conditions <sup>(1)</sup>	Co	Units	
Parameters	Description	Conditions	Min.	Max.	Units
t <sub>PLH</sub> t <sub>PHL</sub>	Propagation Delay <sup>(2,3)</sup> Y to In, In to Y	See Test Diagram		0.3	
t <sub>PZH</sub> t <sub>PZL</sub>	Enable Time S or $\overline{\text{EN}}$ to Y or In	San Tagt Diagram	1.5	15.0	ns
t <sub>PHZ</sub> t <sub>PLZ</sub>	Disable Time S or EN to Y or In	See Test Diagram	1.5	12.0	

#### Notes:

- 1. See test circuit and waveforms.
- 2. This parameter is guaranteed but not tested on Propagation Delays.
- 3. The switch contributes no propagational delay other than the RC delay of the On-Resistance of the switch and the load capacitance. The time constant for the switch alone is of the order of 0.30ns for 10pF load. Since this time constant is much smaller than the rise/fall times of typical driving signals, it adds very little propagational delay to the system. Propagational delay of the switch when used in a system is determined by the driving circuit on the driving side of the switch and its interaction with the load on the driven side.


## **Bandwidth vs Capacitance**

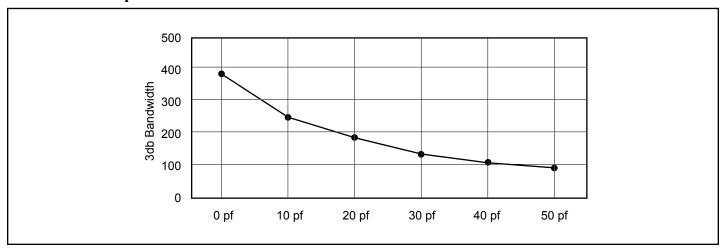

06-0114 5 PS8756C 06/29/06



## Test Circuit for Electrical Characteristics<sup>(1)</sup>

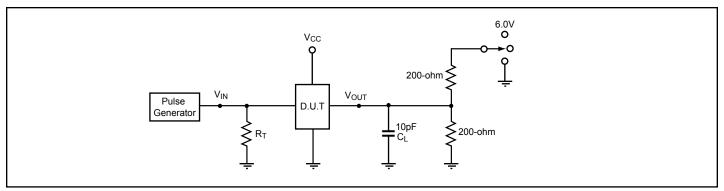


#### **Notes:**

- 1.  $C_L = Load$  capacitance: includes jig and probe capacitance.
- 2.  $R_T$  = Termination resistance: should be equal to  $Z_{OUT}$  of the Pulse Generator
- 3. Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.
- 4. All input impulses are supplied by generators having the following characteristics:  $PRR \le MHz$ ,  $Z_O = 50\Omega$ ,  $t_R \le 2.5 ns$ ,  $t_F \le 2.5 ns$ .
- 5. The outputs are measured one at a time with one transition per measurement.

#### **Switch Positions**


Test	Switch
$t_{PLZ}, t_{PZL}$	6.0V
t <sub>PHZ</sub> , t <sub>PZH</sub>	GND
Prop Delay	Open

## **Switching Waveforms**

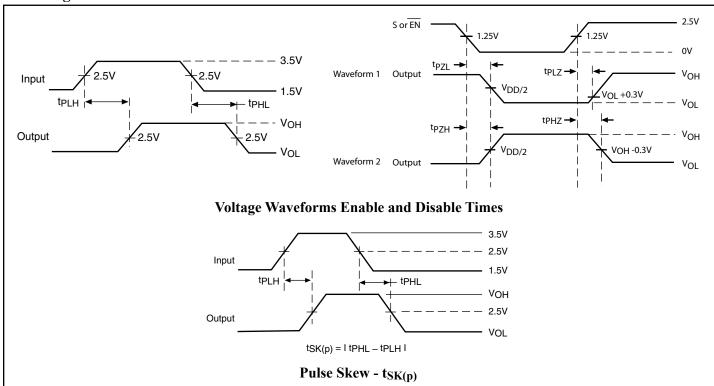




## **Test Circuit for Dynamic Electrical Characteristics**

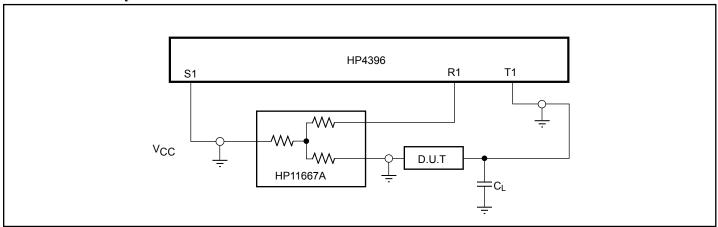


06-0114 7 PS8756C 06/29/06



## **Off Isolation** ( $V_{CC} = 3.3V, 25^{\circ}C$ )

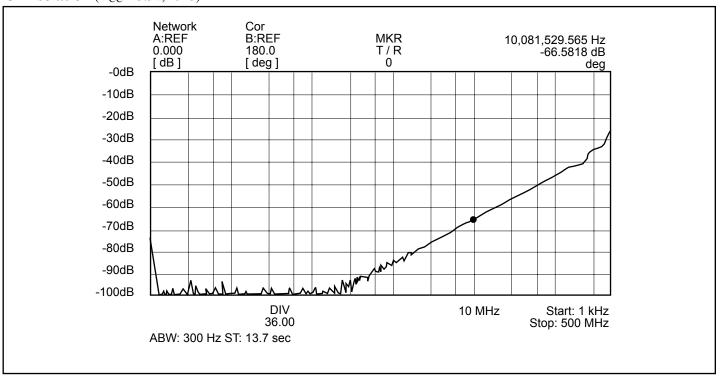

### Crosstalk ( $V_{CC} = 3.3V, 25^{\circ}C$ )

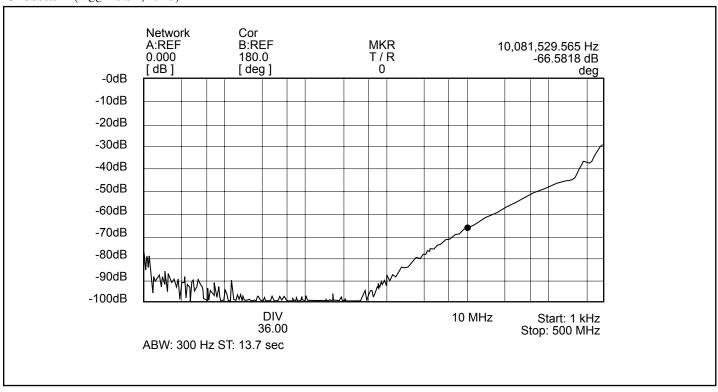



## **Applications Information**

## **Logic Inputs**


The logic control inputs can be driven upto 3.6V regardless of the supply voltage. For example, given a +3.3V supply,  $\overline{\text{EN}}$  maybe driven LOW to 0V and HIGH to 3.6V. Driving  $\overline{\text{EN}}$  Rail-to-Rail<sup>®</sup> minimizes power consumption.

#### **Hot Insertion**

For Datacom and Telecom applications that have ten or more volts passing through the backplane, a high voltage from the power supply may be seen at the device input pins during hot insertion. The PI3Vxxx devices have maximum limits of 6V and 120mA for 20ns. If the power is higher or applied for a longer time or repeatedly reaches the maximum limits, the devices can be damaged.

06-0114 9 PS8756C 06/29/06



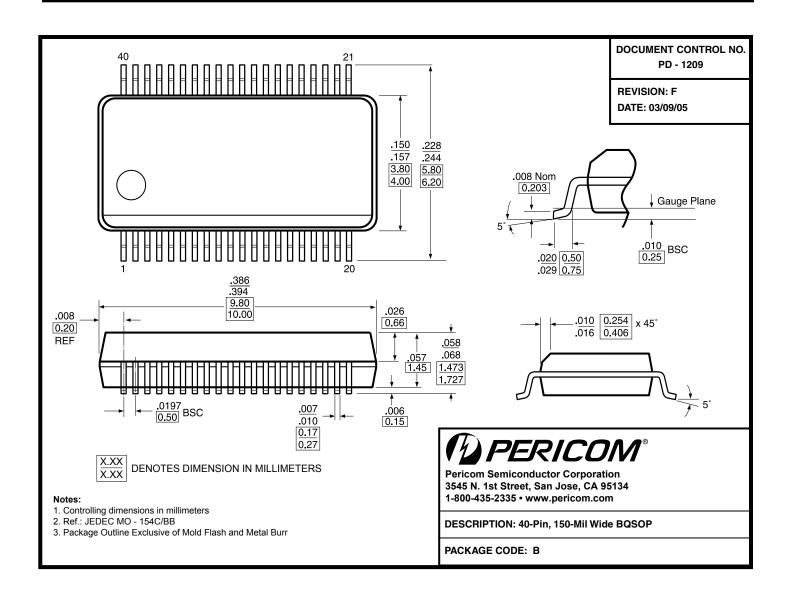

## Ordering Information<sup>(1-3)</sup>

Ordering Code	Packaging Code	Package Description
PI3V314B	В	40-pin 150-mil wide plastic BQSOP
PI3V314BE	В	Pb-free & Green, 40-pin 150-mil wide plastic BQSOP

#### **Notes:**

- 1. Thermal characteristics can be found on the company web site at www.pericom.com/packaging/
- 2. E = Lead-free and Green
- 3. Adding an X suffix = tape/reel

Pericom Semiconductor Corporation • 1-800-435-2336 • www.pericom.com