


REV.	DESCRIPTION/ECO NO.	DATE
	RELEASE AND CANCEL	2/7/03
	BXA503/KIT & BXA-503/INV	
A	OUTPUT CURRENT TO SINGLE	9/21/06

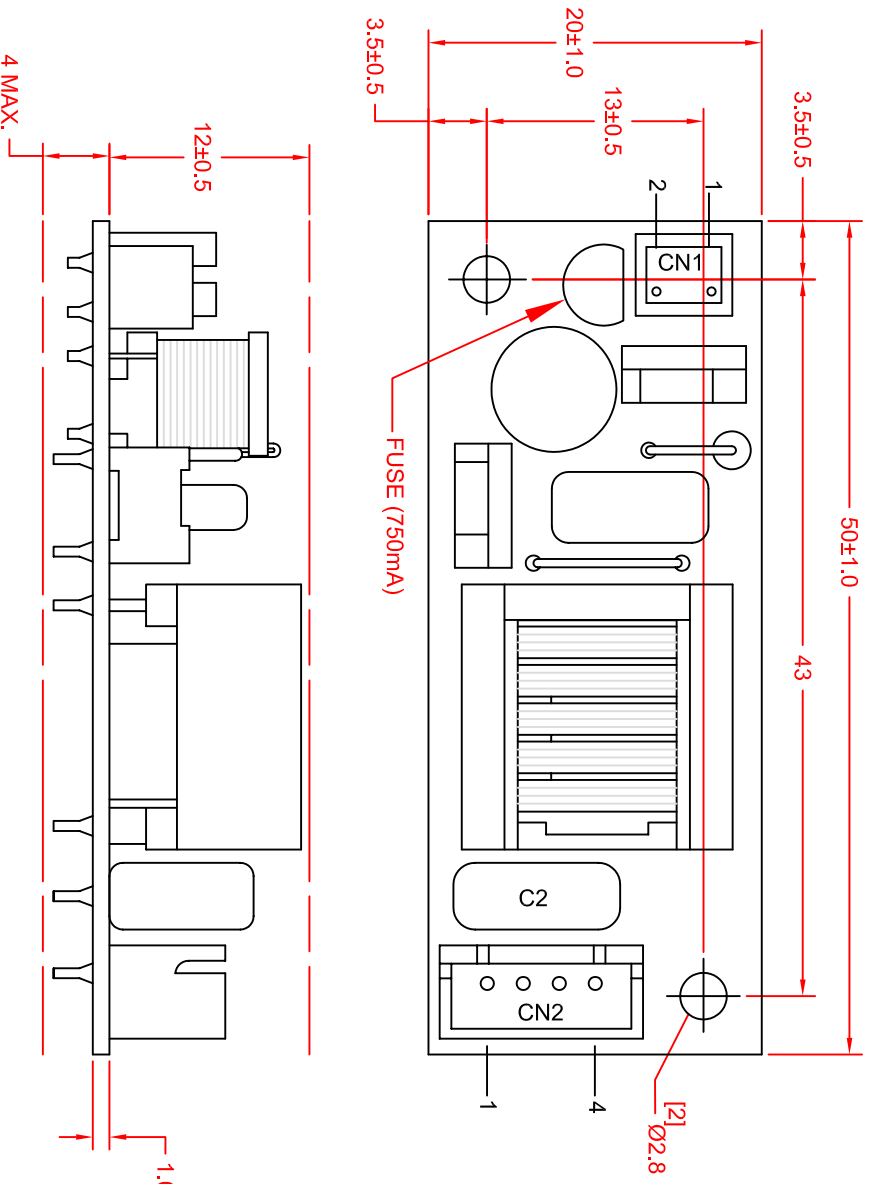

NO.	PIN NUMBER	JKL MATING WIRE HARNESS
CN1	1 INPUT (GND)	BXC-10574
	2 INPUT (+V)	
CN2	1 OUTPUT (HV/1)	BXC-10585
	2 NO CONNECTION	
	3	
	4 OUT LAMP (GND)	

OPERATING SPECIFICATIONS

CHARACTERISTICS	MIN	TYP	MAX
INPUT VOLTAGE: (vdc)	5.0	6.0	7.0
INPUT CURRENT: (mA)	150	350	700
OUTPUT VOLTAGE: (Vrms)	700	1200	1450
OUTPUT CURRENT: (mA)	3.0	5.0	6.5
OUTPUT FREQUENCY: (KHz)	30	35	40
OPERATING TEMP: (CELSIUS)	-	25	-

NOTE:
 MATING CONNECTORS ARE NOT INCLUDED WITH INVERTER.
 JKL WIRE HARNESS BXC-10574 AND BXC-10585 CAN BE ORDERED SEPARATELY.

<p>METRIC</p>		<p>DIMENSIONS ARE IN MILLIMETERS</p> <p>TOLERANCE UNLESS OTHERWISE SPECIFIED</p> <p>1 PL +/- 0.3</p> <p>2 PL +/-</p> <p>ANGLE +/- 0</p>	
<p>THIRD ANGLE PROJECTION</p>	<p>APP'D BY</p>	<p>DATE</p>	<p>DATE</p>
<p>DRAWN BY</p> <p>L. WENGSTROM</p>	<p>E.D.</p>	<p>9/21/06</p>	<p>9/21/06</p>
<p>TITLE</p> <p>JKL COMPONENTS CORPORATION</p> <p>CCFL SINGLE OUTPUT INVERTER</p>		<p>SIZE</p> <p>A</p>	<p>FSCM NO.</p> <p>55335</p>
<p>SCALE</p> <p>NONE</p>		<p>DRAWING NO.</p> <p>BXA-503</p>	<p>REV. NO.</p> <p>A</p>
<p>MANUAL REVISIONS NOT PERMITTED</p>		<p>RELEASED DATE</p> <p>2/7/03</p>	<p>REVISION DATE</p> <p>9/21/06</p>
		<p>REV. NO.</p> <p>A</p>	<p>SHEET OF</p>