
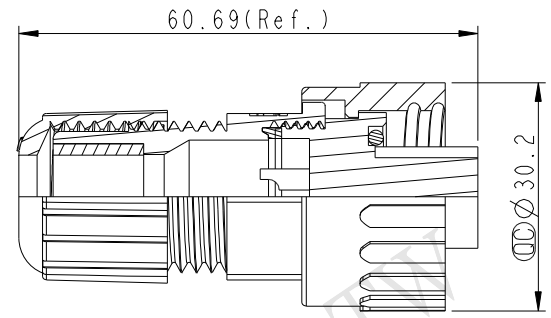

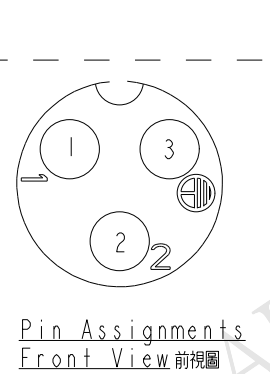



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-870143	2008/07/25	Yuri	Update Drawing
C	LEN1580262	2015/05/28	Jinhai	Change Logo

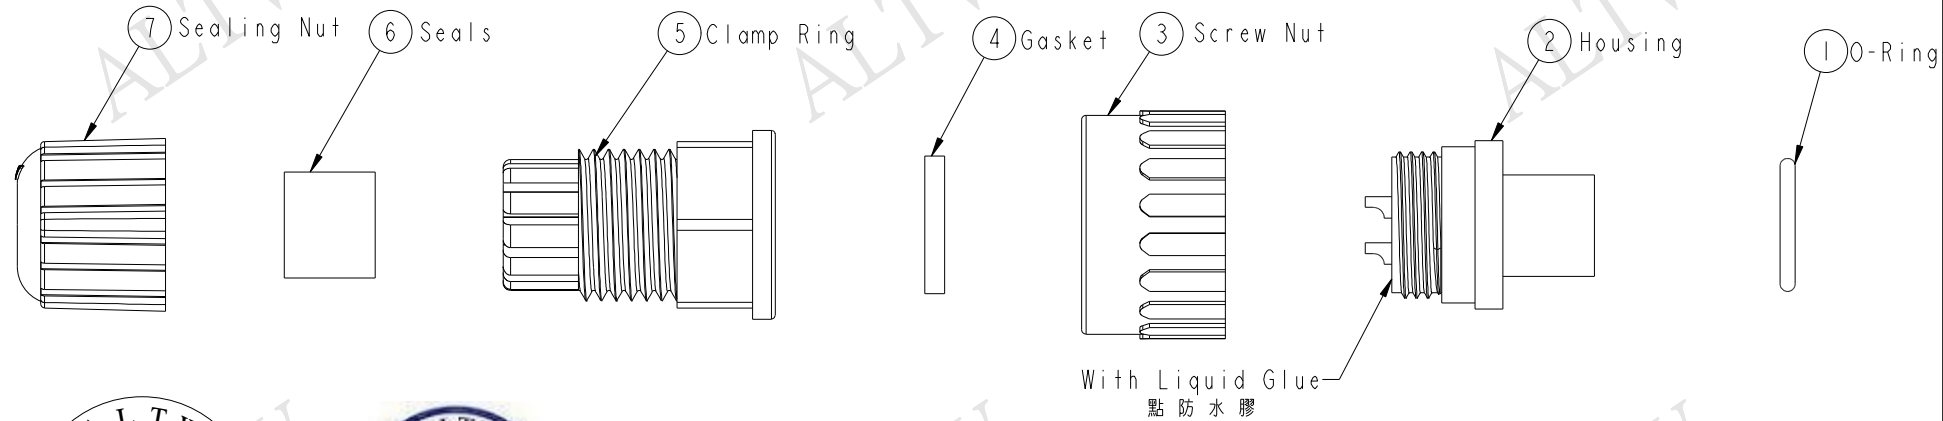

- Note:
- * Waterproof Rate : IP67
 - * (CC) Important Dimension.
(CC 為重點檢驗尺寸)
 - * Seals for Cable OD: $\varnothing 5.5\text{mm} \sim \varnothing 10.8\text{mm}$
(防水墊圈限用線徑: $\varnothing 5.5\text{mm} \sim \varnothing 10.8\text{mm}$)
 - * One Set Unassembled in One LTW Sealed Bag
(每一組未組裝, 放置於一個LTW封口袋)
 - * Housing: Nylon+GF, Black
 - * Female Pin: Copper Alloy, Gold Plated
 - * O-ring: EPDM, Black
 - * Screw Nut: Nylon+GF, Black
 - * Gasket: Silicone, Black
 - * Clamp Ring: Nylon, Black
 - * Seals: EPDM, Black
 - * Sealing Nut: Nylon, Black

UNIT:mm		
TOLERANCE		
±0.5 mm		

TITLE Power, Assy Screw 3Pin F Conn F Pin			
SCALE 1:1	SIZE A4	SHEET 1 OF 1	
REV. C	WC-REV. A.2	(CC): Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO PWF-03BFFA-SL7001	DRAWN BY Jinhai	DATE 2015-05-28
DWG NO PWF-03BFFA-SL7001	CHECKED BY Tom	DATE 2015-05-28
CUSTOMER ALTW	APPROVED BY Jerry	DATE 2015-05-28

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.