

COMPACT 4G LTE M2M ROUTER



# **DIGI TRANSPORT® WR11 XT**

Secure 3G/4G/LTE cellular router for retail, kiosk and industrial control applications

Digi TransPort WR11 XT delivers a cost-optimized 4G LTE connection to mission critical M2M applications around the world. These cellular routers are ideal for connecting:

- Building and process automation controllers
- Smart grid assets (meters, switches and controllers)
- IP cameras and access controllers
- Remote data loggers, flow meters and sensing equipment
- Telco infrastructure controllers
- ATMs, kiosks and service terminals

The Digi TransPort WR11 XT provides a secure, reliable connection to industrial controllers, retail terminals and process automation equipment on third party sites or remote locations. This drop-in connectivity gives operators a way to reduce the cost of downtime and service calls and also increase revenue by bringing distributed sites online faster.

Digi management solutions provide easy setup, configuration and maintenance of large installations of remote Digi TransPort devices. Digi Remote Manager® offers webbased device management for remote Digi cellular routers, gateways and third-party devices.

#### **BENEFITS:**

- Global HSPA+ and 4G LTE support and certification
- Extremely resilient cellular connection through patented
   Digi SureLink™, VRRP+ protocol and dual SIM slots
- Enterprise routing features for security, logging and redundancy (e.g., stateful firewall, VPN, SNMP); no annual enterprise software license required
- Digi Remote Manager provides mass configuration, device management and troubleshooting tools
- Rugged aluminum enclosure, flanges and optional DIN rail clip for flexible mounting
- 5-year warranty standard—no additional cost

# RELATED PRODUCTS












Digi Remote Manager°



| LTE - EMEA (M3)   |  |
|---|--|
| LTE - EMEA (M3)   |  |
| LTE - UNITED STATES (M4)  Transfer rate (max): 10 Mbps down, 5 Mbps up Approvals: Sprint (pending)  LTE CAT 1: 700(B12,B13)/850(B5)/AWS(B4)/1900(B2) H5PA+: 850/1900 MHz Transfer rate (max): 10 Mbps down, 5 Mbps up Approvals: PTCRB, AT&T, Verizon, Telus (pending)  LTE CAT 1: 700(B28)/850(B5)/900(B8)/1800(B3)/2100(B1) 3G H5PA+: 850/900/2100 MHz Transfer rate (max): 10 Mbps down, 5 Mbps up Approvals: PTCRB, Voldafone  CONNECTORS  (2) 50 \( \Omegas \text{ MA} \text{ (can wait)}  (c      |  |
| HSPA+: 850/1900 MHz Transfer rate (max): 10 Mbps down, 5 Mbps up Approvals: PTCRB, AT&T, Verizon, Telus (pending)  LTE - ANZ/LATAM (M9)  LTE CAT 1: 700(β28)/850(β5)/900(β8)/1800(β3)/2100(β1) 3G HSPA+: 850/900/2100 MHz Transfer rate (max): 10 Mbps down, 5 Mbps up  GLOBAL HSPA+ - (U9)  GLOBAL HSPA+ - (U |  |
| LTE - ANZ/LATAM (M9)  3G HSPA+: 850/900/2100 MHz Transfer rate (max): 10 Mbps down, 5 Mbps up  3G HSPA+: 850/900/1700AWS/1900/2100 MHz 2G EDGE/GPRS: 850/900/1800/1900 MHz Transfer rate (max): 21 Mbps down, 5.76 Mbps up Approvals: PTCRB, Vodafone  CONNECTORS  (2) 50 \( \Omega \text{ SMA} \text{ (center pin: female); (1) connector for non-LTE models}  SIM SLOTS  (2) Mini-SIM (2FF)  SIM SECURITY  Screw-down SIM cover  SOFTWARE & MANAGEMENT  REMOTE MANAGEMENT  Digi Remote Manager® (cloud based); SNMP v1/v2c/v3 (user installed/managed)  LOCAL MANAGEMENT  WebUI (HTTP/HTTPS); CLI (Telnet, SSH, SMS)  MANAGEMENT/ TROUBLESHOOTING TOOLS  FTP, SFTP, SCP; Protocol analyzer with PCAP for Wireshark; Event logging with Syslog and SMTP; NTP/SNTP  THERNET  PORTS  (1) RJ-45; 10/100 Mbps (auto-sensing)  PHYSICAL   |  |
| GLOBAL HSPA+ - (U9)  2G EDGE/GPRS: 850/900/1800/1900 MHz Transfer rate (max): 21 Mbps down, 5.76 Mbps up Approvals: PTCRB, Vodafone  CONNECTORS  (2) 50 Ω SMA (center pin: female); (1) connector for non-LTE models  SIM SLOTS  (2) Mini-SIM (2FF)  SIM SECURITY  Screw-down SIM cover  SOFTWARE & MANAGEMENT  REMOTE MANAGEMENT  Digi Remote Manager® (cloud based); SNMP v1/v2c/v3 (user installed/managed)  LOCAL MANAGEMENT  WebUI (HTTP/HTTPS); CLI (Telnet, SSH, SMS)  MANAGEMENT/ TROUBLESHOOTING TOOLS  MEMORY  20 MB RAM, 10 MB file space  ETHERNET  PORTS  (1) RJ-45; 10/100 Mbps (auto-sensing)  PHYSICAL  |  |
| SIM SLOTS  (2) Mini-SIM (2FF)  SIM SECURITY  Screw-down SIM cover  SOFTWARE & MANAGEMENT  REMOTE MANAGEMENT  Digi Remote Manager® (cloud based); SNMP v1/v2c/v3 (user installed/managed)  LOCAL MANAGEMENT  WebUI (HTTP/HTTPS); CLI (Telnet, SSH, SMS)  MANAGEMENT/ TROUBLESHOOTING TOOLS  MEMORY  TROUBLESHOOTING TOOLS  MEMORY  20 MB RAM, 10 MB file space  ETHERNET  PORTS  (1) RJ-45; 10/100 Mbps (auto-sensing)  PHYSICAL   |  |
| SIM SECURITY  SOFTWARE & MANAGEMENT  REMOTE MANAGEMENT  Digi Remote Manager® (cloud based); SNMP v1/v2c/v3 (user installed/managed)  LOCAL MANAGEMENT  MANAGEMENT  MANAGEMENT/ TROUBLESHOOTING TOOLS  MEMORY  20 MB RAM, 10 MB file space  ETHERNET  PORTS  (1) RJ-45; 10/100 Mbps (auto-sensing)  PHYSICAL   |  |
| SOFTWARE & MANAGEMENT  REMOTE MANAGEMENT  Digi Remote Manager® (cloud based); SNMP v1/v2c/v3 (user installed/managed)  LOCAL MANAGEMENT  WebUI (HTTP/HTTPS); CLI (Telnet, SSH, SMS)  MANAGEMENT/ TROUBLESHOOTING TOOLS  FTP, SFTP, SCP; Protocol analyzer with PCAP for Wireshark; Event logging with Syslog and SMTP; NTP/SNTP  MEMORY  20 MB RAM, 10 MB file space  ETHERNET  PORTS  (1) RJ-45; 10/100 Mbps (auto-sensing)  PHYSICAL  |  |
| REMOTE MANAGEMENT  Digi Remote Manager® (cloud based); SNMP v1/v2c/v3 (user installed/managed)  LOCAL MANAGEMENT  WebUI (HTTP/HTTPS); CLI (Telnet, SSH, SMS)  MANAGEMENT/ TROUBLESHOOTING TOOLS  MEMORY  20 MB RAM, 10 MB file space  ETHERNET  PORTS  (1) RJ-45; 10/100 Mbps (auto-sensing)  PHYSICAL  |  |
| LOCAL MANAGEMENT  MANAGEMENT/ TROUBLESHOOTING TOOLS  MEMORY  20 MB RAM, 10 MB file space  ETHERNET  PORTS  (1) RJ-45; 10/100 Mbps (auto-sensing)  PHYSICAL  |  |
| MANAGEMENT/ TROUBLESHOOTING TOOLS  FTP, SFTP, SCP; Protocol analyzer with PCAP for Wireshark; Event logging with Syslog and SMTP; NTP/SNTP  MEMORY  20 MB RAM, 10 MB file space  ETHERNET  PORTS  (1) RJ-45; 10/100 Mbps (auto-sensing)  PHYSICAL   |  |
| TROUBLESHOOTING TOOLS  MEMORY  20 MB RAM, 10 MB file space  ETHERNET  PORTS  (1) RJ-45; 10/100 Mbps (auto-sensing)  PHYSICAL  |  |
| PORTS (1) RJ-45; 10/100 Mbps (auto-sensing)  PHYSICAL   |  |
| PORTS (1) RJ-45; 10/100 Mbps (auto-sensing) PHYSICAL  |  |
| PHYSICAL  |  |
|   |  |
| DIMENSIONS (L X W X H) 3 in x 4 in x 1 in (7.62 cm x 10.16 cm x 2.54 cm)  |  |
|   |  |
| <b>WEIGHT</b> 0.5 lb (.22 kg)   |  |
| STATUS LEDS Power on, WWAN signal strength, WWAN service  |  |
| ENCLOSURE Industrial (Metal) / IP30   |  |
| POWER REQUIREMENTS  |  |
| POWER INPUT 5 VDC, 15W minimum power source required  |  |
| POWER SUPPLY Must be used with a Digi approved power supply   |  |
| POWER CONSUMPTION 3.5W typical (Idle); 10W typical (Peak Tx/Rx)   |  |
| ENVIRONMENTAL   |  |
| OPERATING TEMPERATURE -30° C to +70° C (-22° F to +158° F) reduced cellular performance may occur above +60° C  |  |
| RELATIVE HUMIDITY 5% to 95% (non-condensing)  |  |
| APPROVALS   |  |
| CELLULAR PTCRB  |  |
| <b>SAFETY</b> UL 60950, CSA 22.2 No. 60950, EN60950   |  |
| EMISSIONS/IMMUNITY CE, FCC Part 15 Class B, AS/NZS CISPR 22, EN55024, EN55022 Class B   |  |
| WARRANTY  |  |
| PRODUCT WARRANTY 5 years  |  |

## DIGI TRANSPORT® WR11 XT - TOP

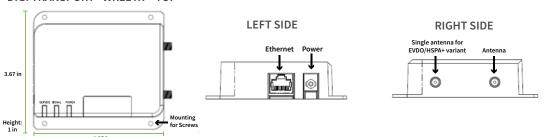



| ENTERPRISE SOFTWARE | DESCRIPTION  |
|---------------------|--|
| PROTOCOL SUPPORT    | HTTP, HTTPS, FTP, SSL, SMTP, SNMP (v1/v2c/v3), SSH, Telnet and CLI for web management; Remote management via Digi Remote Manager; SMS management, protocol analyzer, ability to capture PCAP for use with Wireshark; DynDNS; Dynamic DNS client compatible with BIND9/No-IP/DynDNS   |
| SECURITY/VPN        | IP filtering, stateful inspection firewall with scripting, address and port translation; VPN: IPSec with IKEv1, IKEv2, NAT Traversal; SSL, SSLv2, SSLv3, FIPS 197, open VPN client and server; PPTP, L2TP;(5) VPN tunnels (not upgradable); Cryptology: SHA-1, MD5, RSA; Encryption: DES, 3DES and AES up to 256-bit (CBC mode for IPsec); Authentication: RADIUS, TACACS+, SCEP for X.509; certificates; Content filtering (via 3rd party); MAC address filtering; VLAN support |
| ROUTING/FAILOVER    | IP pass-through; NAT, NAPT with IP port forwarding; Ethernet bridging; GRE; Multicast routing; Routing protocols: PPP, PPPoE, RIP (v1, v2) OSPF, SRI, BGP, iGMP routing (multicast); RSTP (Rapid Spanning Tree Protocol); IP failover: VRRP, VRRP+TM; Automatic failover/ failback to second GSM network/standby APN   |
| OTHER PROTOCOLS     | DHCP; Dynamic DNS client compatible with BIND9/No-IP/DynDNS; QoS via TOS/DSCP/WRED   |

## **DIGI REMOTE MANAGER**°



#### **INFRASTRUCTURE**

- Hosted in a commercial-grade SAS 70-certified environment
- Superior availability, operating to 99.9% or greater
- Open APIs available to support application development

### **CAPABILITIES**

- Centralized management of remote devices over 3G/4G/LTE
- Define standard configurations and automatically monitor individual devices for PCI security compliance
- Report and alert on performance statistics, including connection history, signal quality, latency, data usage and packet loss
- No servers or applications to operate and maintain
- Complete tasks for your entire device network in minutes
- Edit configurations and update firmware for your individual devices or groups
- Monitor the status and location of your remote device via a web browser
- Active or deactivate cellular lines and monitor data to ensure you never incur overage charges

#### **SECURITY**

- Certified SSAE-16 facilities
- Over 175 Security Controls in place to protect your data
- Enables compliance with security frameworks like PCI, HIPAA, NIST and more
- Earned SkyHigh's Cloud Trust Program highest ranking of Enterprise-Ready

| PART NUMBERS     | DIGI TRANSPORT WR11 XT   |
|------------------|--|
| WR11-M300-DE1-XB | Digi TransPort WR11 XT - 4G LTE EMEA/APAC, Single Ethernet     |
| WR11-M600-DE1-XB | Digi TransPort WR11 XT - 4G LTE Sprint, Single Ethernet        |
| WR11-M900-DE1-XB | Digi TransPort WR11 XT - 4G LTE North America, Single Ethernet |
| WR11-U900-DE1-XB | Digi TransPort WR11 XT - 4G LTE APAC/LATAM, Single Ethernet    |
| WR11-U900-DE1-XB | Digi TransPort WR11 XT - HSPA+ Global, Single Ethernet         |
| WR11-U900-DE1-XW | Digi TransPort WR11 XT - HSPA+ Global, Single Ethernet         |
| WR11-L600-DE1-XU | Digi TransPort WR11 XT - 4G LTE North America, Single Ethernet |
| WR11-L700-DE1-XB | Digi TransPort WR11 XT - 4G LTE EMEA/APAC, Single Ethernet     |
| WR11-L700-DE1-XW | Digi TransPort WR11 XT - 4G LTE EMEA/APAC, Single Ethernet     |
| WR11-L800-DE1-XU | Digi TransPort WR11 XT - 4G LTE Verizon, Single Ethernet       |



| PART NUMBERS | ACCESSORIES*   |
|--------------|--|
| 76000926     | Antenna - Cellular, 3G/4G/LTE  |
| 76000954     | Antenna Base – SMA, 1m, RG174  |
| 76002074     | Accessory Kit - AC Power, Std Temperature, EU Plug   |
| 76002065     | Accessory Kit - DC Power   |
| 76002062     | Accessory Kit - AC Power, Std Temperature, US Plug   |
| 76002063     | Accessory Kit - AC Power, Std Temperature, Intl Plugs  |
| 76002064     | Accessory Kit - AC Power, Extd Temperature, Intl Plugs   |
| 76000935     | AC Power Supply - EU Plug to 5VDC - 2.5mm locking barrel plug  |
| 76000965     | AC Power Supply - Extd Temperature, Universal plugs (US, EU, UK, AU) to 5VDC - 2.5mm locking barrel plug |
| 76000934     | AC Power Supply - US Plug to 5VDC - 2.5mm locking barrel plug  |
| 76000976     | DC Power Supply - Converts 9-30VDC to 5VDC - 2.5mm locking barrel plug                                   |
| 76002021     | AC Power Supply - Std Temperature, Universal plugs (US, EU, UK, AU) to 5VDC - 2.5mm locking barrel plug  |
| 76000682     | Mounting Bracket – DIN Rail  |
| 76000826     | Cable - Ethernet, RJ45 to RJ45, 2m   |

<sup>\*</sup>Sold separately, unless otherwise noted.

# FOR MORE INFORMATION PLEASE VISIT WWW.DIGI.COM

 $\textbf{DIGI SERVICE AND SUPPORT} \, / \, \textbf{You can purchase with confidence knowing that Digi} \,$ is always available to serve you with expert technical support and our industry  $leading\ warranty.\ For\ detailed\ information\ visit\ www.digi.com/support.$ 

© 1996-2018 Digi International Inc. All rights reserved. All trademarks are the property of their respective owners.

DIGI INTERNATIONAL WORLDWIDE HQ 877-912-3444 / 952-912-3444 / www.digi.com

DIGI INTERNATIONAL GERMANY +49-89-540-428-0

DIGI INTERNATIONAL JAPAN +81-3-5428-0261 / www.digi-intl.co.jp DIGI INTERNATIONAL SINGAPORE +65-6213-5380

DIGI INTERNATIONAL CHINA +86-21-50492199 / www.digi.com.cn

